

# Clamps, Grabs & Tongs

Authorized Sales & Service  
**J. HERBERT CORPORATION**  
 Call 1-800-255-0588  
 407-846-0588 Fax: 846-1066  
 info@jherbertcorp.com  
 Visit us online:  
 www.jherbertcorp.com

## Model ST - Slab Tongs




### PRODUCT FEATURES:

- Designed for lifting dry slabs of concrete, stone, or metal that must be protected from scratching or marring.
- Use in construction work to position slabs.
- The curved pads give proper contact for gripping smooth surfaces and handling a large range of sizes.
- Polyurethane gripping surfaces are standard.
- A manual latch is standard and locks the tong arms for easy placement on the load.
- Complies with ASME standards.

**INSTOCK PROGRAM**

### SPECIFICATIONS


| Model Number | Rated Capacity (lbs.) | Load Width (in.) Min. - Max. | HR Headroom (in.) Min. - Max. | Weight (lbs.) |
|--------------|-----------------------|------------------------------|-------------------------------|---------------|
| 71-0         | 1000                  | 1 - 6                        | 31.30 - 39.58                 | 65            |
| 71-1         | 1000                  | 6 - 10                       | 29 - 41                       | 75            |
| 71-2         | 1500                  | 8 - 12                       | 23.4 - 34.9                   | 85            |
| 71-3         | 1500                  | 10 - 14                      | 28.6 - 41.2                   | 145           |
| 71-4         | 1500                  | 14 - 18                      | 36.8 - 49.8                   | 145           |
| 71-5         | 1500                  | 18 - 22                      | 45.4 - 60.1                   | 150           |

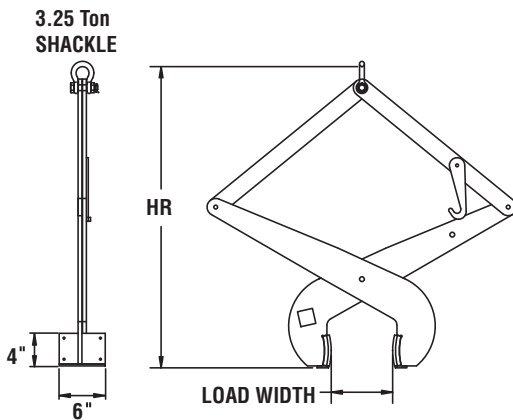

## Model 172 - Concrete Pressure Tong with Urethane Pads

### PRODUCT FEATURES:

- Designed for handling cured concrete products.
- Automatically adjusts to the load size.
- Easy to release manual latch.
- Pivoting pads align with load surface for proper contact.
- Polyurethane pads grip surface without damage.
- Complies with ASME standards.

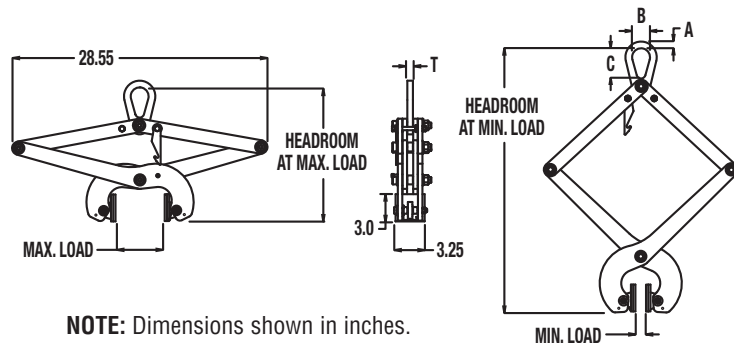

NOTE: Dimensions shown in inches.

### SPECIFICATIONS

| Model No | Rated Cap.<br>(lbs.) | Dimensions (inches)     |                            |                          |       |         |       |       | Weight<br>(lbs.) |
|----------|----------------------|-------------------------|----------------------------|--------------------------|-------|---------|-------|-------|------------------|
|          |                      | Load Width<br>Min - Max | Overall Width<br>Min - Max | HR Headroom<br>Min - Max | Bail  |         |       |       |                  |
| 172-1/4  | 550                  | 1-3/16 - 5-1/2          | 21.8 - 28.8                | 13.5 - 29.5              | 11/16 | 1-11/16 | 2     | 11/16 | 25               |
| 172-1/2  | 1100                 | 1-3/16 - 5-1/2          | 21.8 - 28.8                | 13.5 - 29.5              | 3/4   | 2       | 3-3/8 | 5/8   | 43               |
| 172-1    | 2200                 | 1-3/8-6-3/32            | 32.6-36.6                  | 16.7-29.5                | 11/16 | 2       | 3-1/8 | 3/4   | 93               |

NOTE: 1/4 ton unit has shackle lifting eye.

**INSTOCK PROGRAM**