## mansaver®

- Rotators for all applications
- Designed for safety and ease of use
- Available in any required load capacity


# G1588 Rotating Hooks & Bottom Blocks

### G1588 ROTATING HOOKS & BOTTOM BLOCKS

Mansaver® offers G1588 rotating hooks and bottom blocks in both standard configurations and special designs to meet the requirements of your lifting applications.

Design style in all Mansaver® rotators reflects the many years of ACCO's experience in producing below-the-hook lifters.

All ACCO lifters conform to ASME B30.20 standards for below-the-hook lifters. Standard paint is ACCO safety yellow machine enamel.

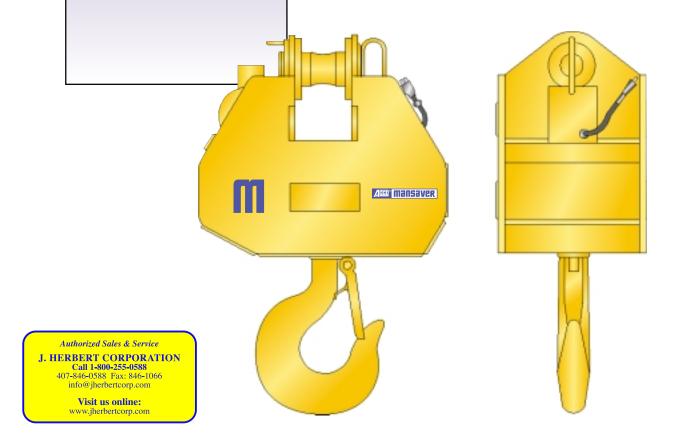


- Heavy duty rotator, removable pin style suspension
- · Forged alloy hook with safety latch



# G1588 Rotating Hooks & Bottom Blocks



- Light duty rotator, low headroom sheave suspension
- · Clevis mount forged alloy hook with safety latch

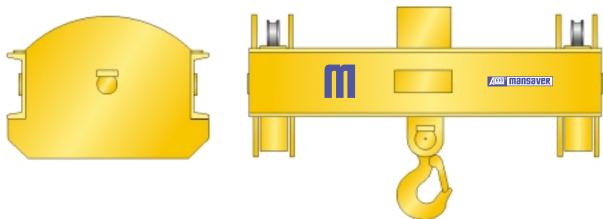

- Low headroom sheave suspended rotator
- Clevis style load suspension

Authorized Sales & Service

J. HERBERT CORPORATION
Call 1-800-255-0588
407-846-0588 Fax: 846-1066
info@jherbertcorp.com

Visit us online:
www.jherbertcorp.com




# G1588 Rotating Hooks & Bottom Blocks

### **Heavy Duty Rotator**

Capacity Tons	A In.	B In.	C In.	D In.	E Std. Model In.	Low hdrm. Model In.	F In.	G In.	Width In.	Weight Lbs.
10	33	23	3-3/8	4.32	10	4	4-1/2	3-3/8	21	1,800
15	33	23	3-3/8	4.32	10	4	4-1/2	3-3/8	21	1,900
20	33	25-1/2	4-1/2	5.50	15	6	6-1/4	4-1/4	21	2,000
25	40	35	4-1/2	5.50	17	7-1/2	7	5	24	2,800
30	40	37-1/2	5	6.75	17	7-1/2	7	5	24	2,900
35	40	37-1/2	5	6.75	19	8	7-1/2	5-1/2	24	3,000
40	46	41	5-7/8	9.63	19	8	7-1/2	5-1/2	27	4,000
50	46	41	5-7/8	9.63	19	8	7-1/2	5-1/2	27	4,200

All dimensions shown are in inches and are approximate.

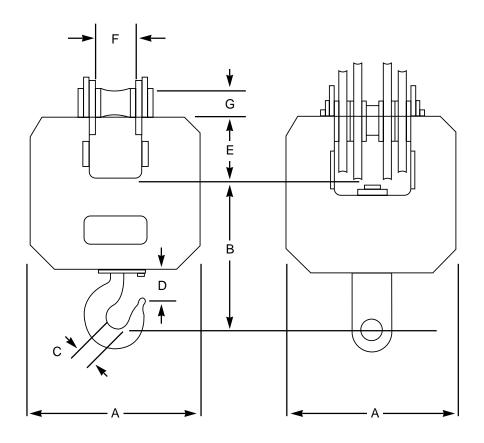

Authorized Sales & Service

J. HERBERT CORPORATION
Call 1-800-255-0588
407-846-0588 Fax: 846-1066
info@jherbertcorp.com

Visit us online:

Visit us online: www.jherbertcorp.com



## G1588 Rotating Hooks Bottom Blocks

## **Selection Guide**

All Mansaver® G1588 rotators are designed to perform specific lifting tasks in conjunction with other lifting equipment. The examples and standard model descriptions on the pre-

ceding pages are intended to assist in determining what model is best suited to your lifting task. Please supply available application information and submit to the ACCO Mansaver® sales

department for pricing and further assistance in equipment choice.

All ACCO Mansaver® Products meet or exceed ANSI B.30.20\* for "Below The Hook" lifting devices.

All ACCO Mansaver® Products have a one year warranty on workmanship and materials.\*\*

- \* Please refer to ANSI Standards B.30.20 and B.30.9 for all lifting applications and guidelines.
- \*\* Consult the factory for further details.

#### **ROTATOR INFORMATION:**

Required rotator capacity:
Capacity of the hoist the unit will be used with:
Degree of rotation (stop to stop, continuous):
Available power supply:
Lifter suspension (pin, sheaves):
If sheave suspended, included sheave diameters, spacing, and wire rope diameter:
Options (load weight readout, collector rings to deliver power and control to under the rotator devices,
other).

If the rotator is to be hook suspended, please provide hoist hook information on back of page.

Lifting Hoist Hook Information on reverse side

Clear Form

Authorized Sales & Service

J. HERBERT CORPORATION
Call 1-800-255-0588
407-846-0588 Fax: 846-1066
info@jherbertcorp.com

Visit us online:


<u>/cco</u>\* 8.7.5



# G1588 Rotating Hooks & Bottom Blocks

### Lifting Hoist Hook Information

(Please Fill Out Completely)

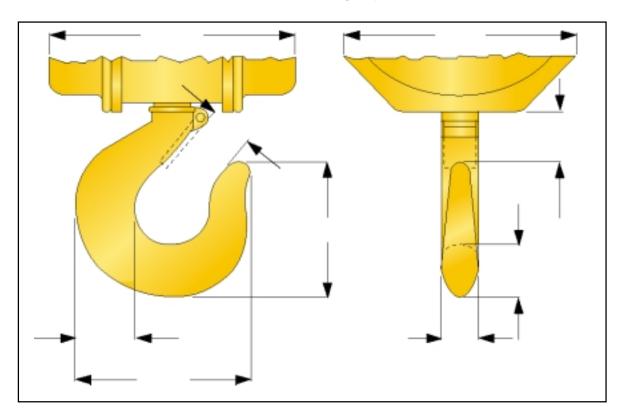



### Acco Chain & Lifting Products Division

76 Acco Drive, Box 792, York, PA 17405 Telephone 800-967-7333 Fax 800-715-8897 www.accolifting.com



Authorized Sales & Service

J. HERBERT CORPORATION
Call 1-800-255-0588
407-846-0588 Fax: 846-1066
info@jherbertcorp.com

Visit us online:

