

# **mansaver®**

- Tong style round stock grabs for all applications
- Designed for safety and ease of use
- Available in any required load capacity

## **G1475 Round Stock Grabs**

### **G1475 ROUND STOCK GRABS**



Mansaver® offers G1475 grabs in configurations to meet the specific requirements of your lifting applications.

Tong style round stock grabs are usually used to handle round bullet and pipe, but can also be used with other shapes and bundles of material.

These lifters have the advantage of being fully mechanical, requiring no external power.

All of these grabs are equipped with mechanical latches providing automatic hold-open and grip-release cycling.

All ACCO lifters conform to ASME B30.20 standards for below-the-hook lifters. Standard paint is ACCO safety yellow machine enamel.

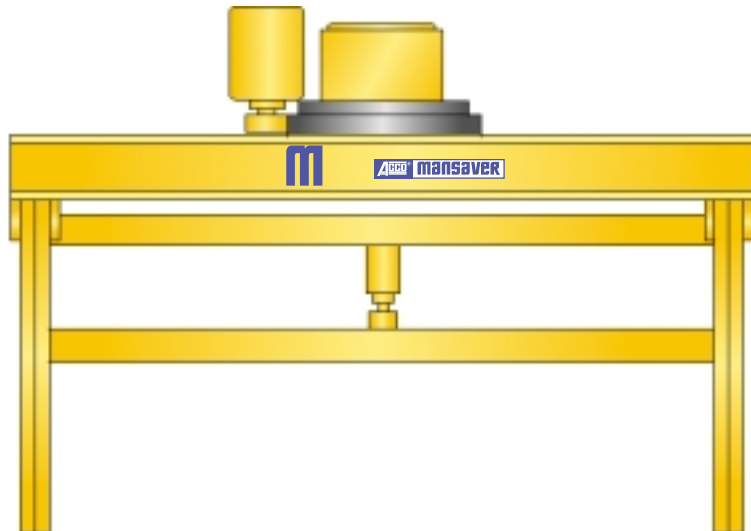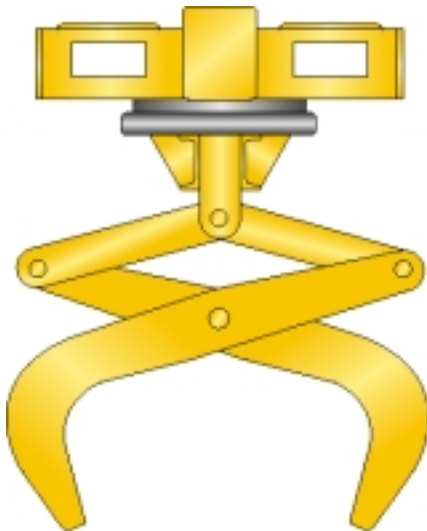


- Automatic pipe grab with motorized rotation
- Designed for fork-lift use

*Authorized Sales & Service*  
**J. HERBERT CORPORATION**  
Call 1-800-255-0588  
407-846-0588 Fax: 846-1066  
info@jherbertcorp.com

Visit us online:  
[www.jherbertcorp.com](http://www.jherbertcorp.com)

**ACCO® 8.4.1**

# G1475 Round Stock Grabs

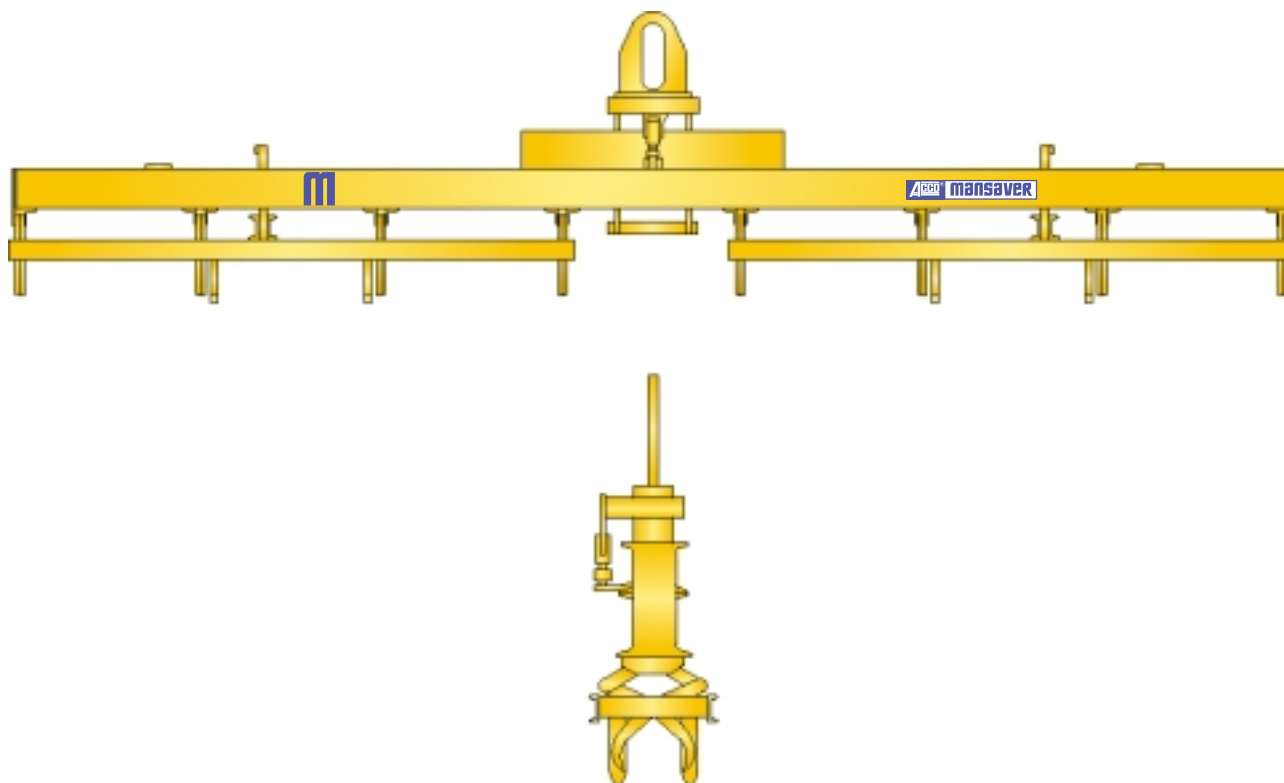

- Multi-tong automatic round billet grab
- Used in handling long, hot billets



# G1475 Round Stock Grabs

## Selection Guide

All Mansaver® G1475 grabs are designed to perform specific lifting tasks in conjunction with other lifting equipment. The grab examples on the preceding page are intended to assist in

determining what style grab is best suited to your lifting task. Please supply available application information and submit to the ACCO Mansaver® sales department for pricing and

further assistance in equipment choice.

All ACCO MANSAYER® Products meet or exceed ANSI B.30.20\* for "Below The Hook" lifting devices.

All ACCO MANSAYER® Products have a one year warranty on workmanship and materials.\*\*

\* Please refer to ANSI Standards B.30.20 and B.30.9 for all lifting applications and guidelines.

\*\* Consult the factory for further details.

### LOAD INFORMATION:

Load material: \_\_\_\_\_

O.D. range: \_\_\_\_\_

Length range: \_\_\_\_\_

Maximum load weight: \_\_\_\_\_

### GRAB INFORMATION:

Required grab capacity: \_\_\_\_\_

Capacity of the hoist the grab will used with: \_\_\_\_\_

Lifter suspension (single, double, fork-lift, other): \_\_\_\_\_

Bail style ( plate, pin, sheaves): \_\_\_\_\_

Options (leg rollers, special paint, powered rotation, other): \_\_\_\_\_

Lifting Hoist Hook Information on reverse side

**Clear Form**

Authorized Sales & Service  
**J. HERBERT CORPORATION**  
Call 1-800-255-0588  
407-846-0588 Fax: 846-1066  
info@jherbertcorp.com


Visit us online:  
www.jherbertcorp.com

**ACCO® 8.4.3**

# G1475 Round Stock Grabs

## Lifting Hoist Hook Information

*(Please Fill Out Completely)*

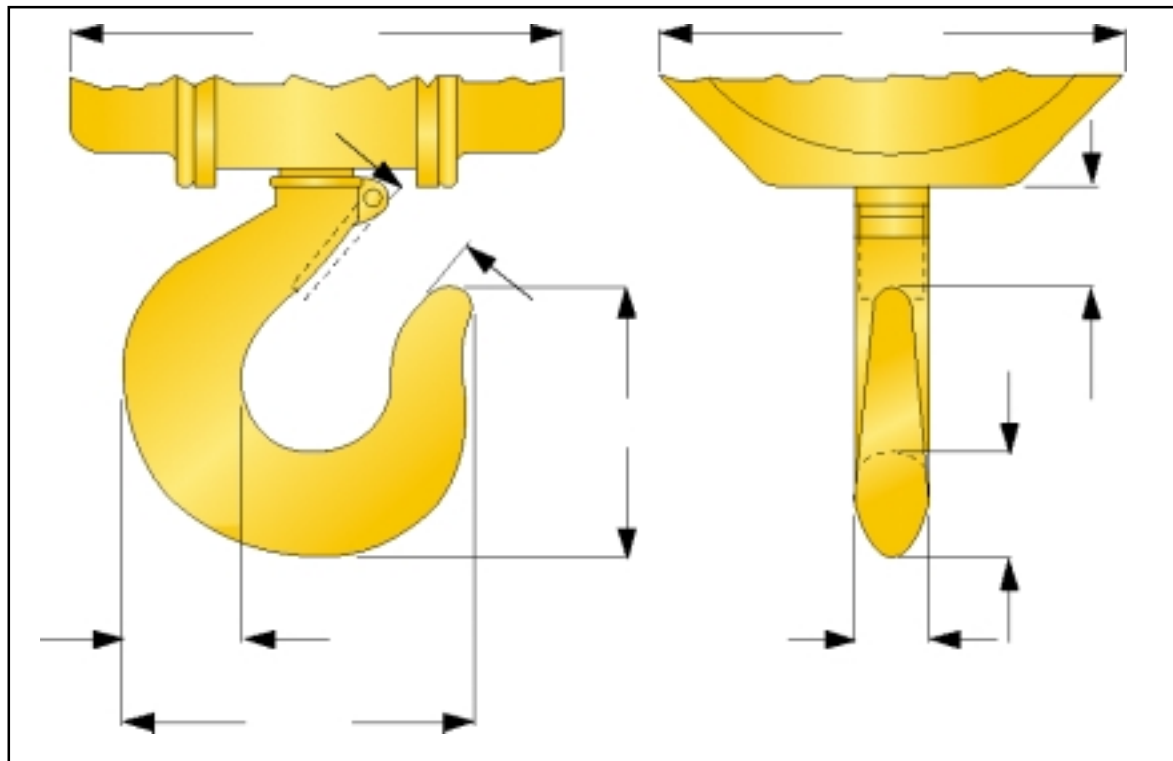

**Acco® Acco Chain & Lifting Products Division**

76 Acco Drive, Box 792, York, PA 17405  
 Telephone 800-967-7333 Fax 800-715-8897  
[www.accolifting.com](http://www.accolifting.com)

PART OF THE **FKI** GROUP OF COMPANIES

**Acco® 8.4.4**

*Authorized Sales & Service*  
**J. HERBERT CORPORATION**  
 Call 1-800-255-0588  
 407-846-0588 Fax: 846-1066  
[info@jherbertcorp.com](mailto:info@jherbertcorp.com)

Visit us online:  
[www.jherbertcorp.com](http://www.jherbertcorp.com)