

mansaver®


- **C-Hook style lifters for any application**
- **Designed for safety and ease of use**
- **Available in any required load capacity**

G1274 C-Hooks

G1274 C-HOOK LIFTERS

Mansaver® model G1274 C-Hooks are most often utilized in metal coil handling, but are useful for other applications where “hook-style” lifting is required. ACCO designs C-Hooks to meet the specific requirements of your application.

All ACCO C-Hooks conform to ASME B30.20 specifications for below-the-hook lifting devices. Standard paint is ACCO safety yellow machine enamel.

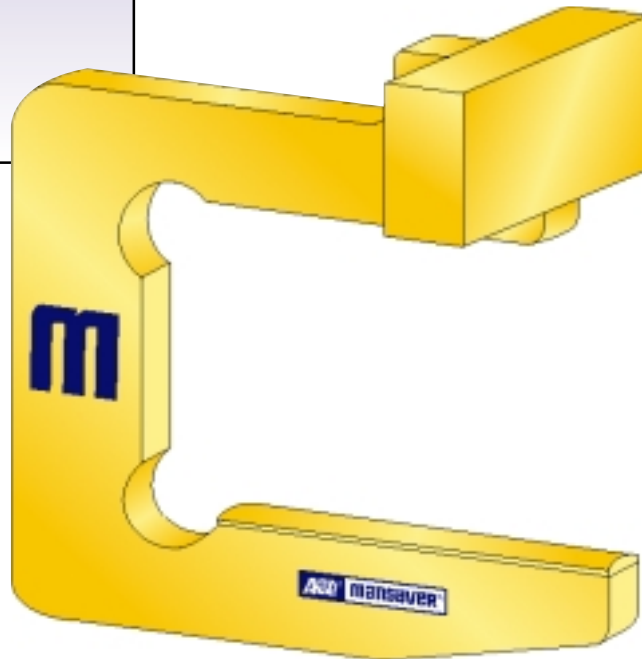


- **Plate style balanced C-Hook for coils**
- **Fixed bail, curved lifting saddle**


Authorized Sales & Service
J. HERBERT CORPORATION
Call 1-800-255-0588
407-846-0588 Fax: 846-1066
info@jherbertcorp.com
Visit us online:
www.jherbertcorp.com

ACCO® 4.1.1

G1274 C-Hooks

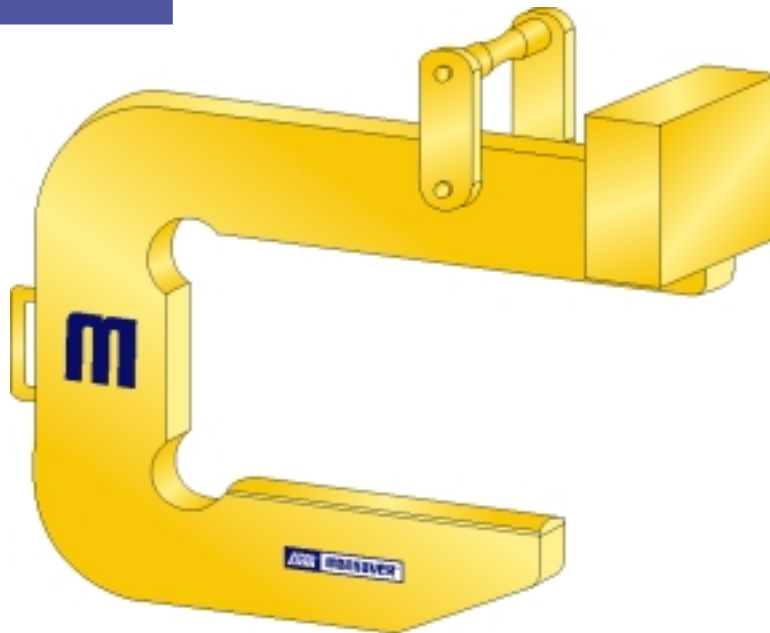


- Plate style balanced C-Hook with pivoting bail

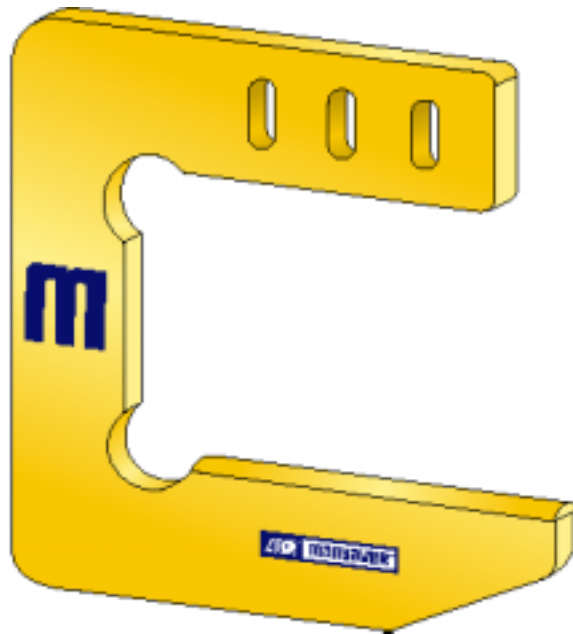


- Unbalanced C-Hook for lighter loads
- Multiple bail openings for balancing

G1274C-Hooks

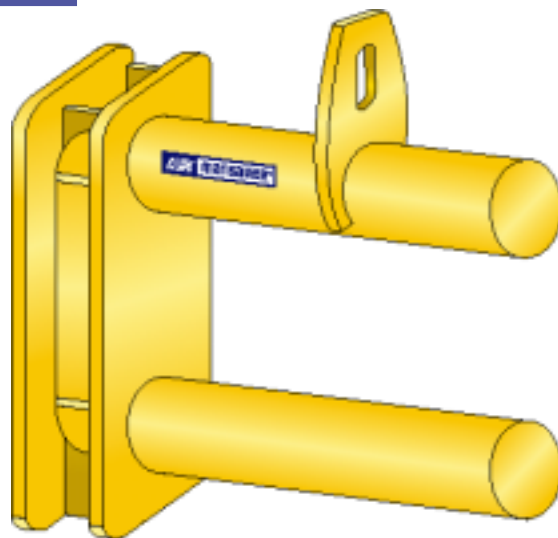

- Pipe style balanced C-Hook
- Provides wider load support area

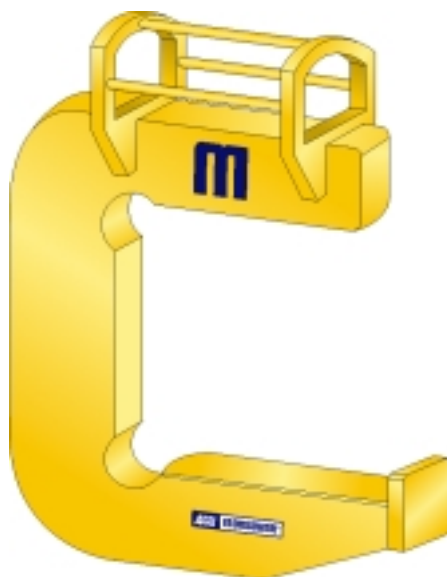

- Unbalanced C-Hook for railcar gondola handling
- Designed to be lifted by a motorized coil grab

Authorized Sales & Service
J. HERBERT CORPORATION
Call 1-800-255-0588
407-846-0588 Fax: 846-1066
info@jherbertcorp.com

Visit us online:
www.jherbertcorp.com

Authorized Sales & Service

J. HERBERT CORPORATION

Call 1-800-255-0588
407-846-0588 Fax: 846-1066
info@jherbertcorp.com

Visit us online:
www.jherbertcorp.com



G1274 C-Hooks

Selection Guide

All Mansaver® G1274 C-Hook lifters are designed to perform specific lifting tasks in conjunction with other lifting equipment.

The lifter examples on the preceding pages and the fill-in

tables below are intended to assist in determining what C-hook design is best suited to your lifting task. Please supply available application information and submit to the Mansaver® sales department for pricing and

further assistance in equipment choice.

All ACCO MANSAYER® Products meet or exceed ANSI B.30.20* for "Below The Hook" lifting devices.

All ACCO MANSAYER® Products have a one year warranty on workmanship and materials.**

* Please refer to ANSI Standards B.30.20 and B.30.9 for all lifting applications and guidelines.

** Consult the factory for further details.

LOAD INFORMATION:

Load description (coils, rolls, aluminum, steel, other): _____

I.D. range: _____

O.D. range: _____

Face width range: _____

Maximum load weight: _____

C-HOOK INFORMATION:

Required hook capacity: _____

Capacity of the hoist hook will be used with: _____

C-Hook type (balanced, unbalanced, multiple, rotating, other): _____

Options (special paint, special markings, bumpers, other): _____

Lifting Hoist Hook Information on reverse side


Clear Form

Authorized Sales & Service
J. HERBERT CORPORATION
Call 1-800-255-0588
407-846-0588 Fax: 846-1066
info@jherbertcorp.com
Visit us online:
www.jherbertcorp.com

ACCO® 4.1.5

Lifting Hoist Hook Information

(Please Fill Out Completely)

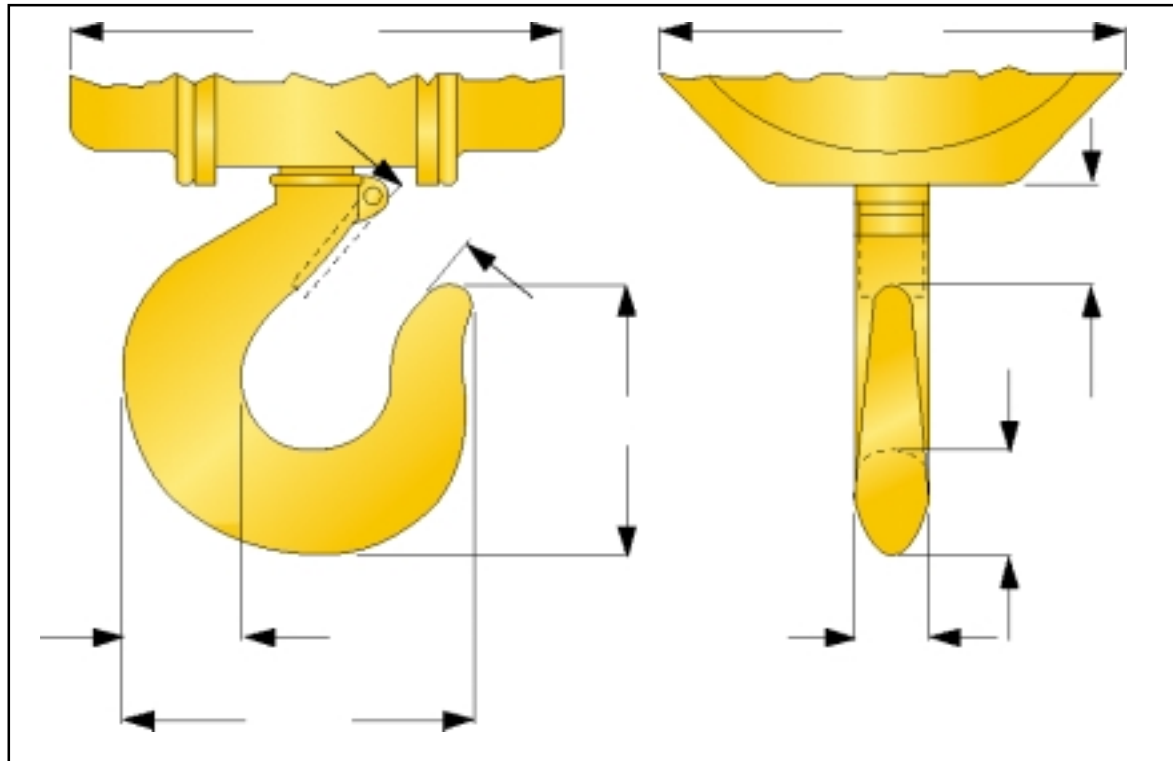

Acco® Acco Chain & Lifting Products Division

76 Acco Drive, Box 792, York, PA 17405
Telephone 800-967-7333 Fax 800-715-8897
www.accolifting.com

PART OF THE **FKI** GROUP OF COMPANIES

Acco® 4.1.6

Authorized Sales & Service
J. HERBERT CORPORATION
Call 1-800-255-0588
407-846-0588 Fax: 846-1066
info@jherbertcorp.com

Visit us online:
www.jherbertcorp.com